

A

B

C

D

E

F

G

A

B







C

D

E

F

G

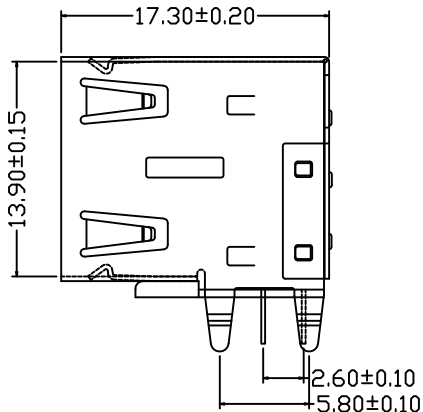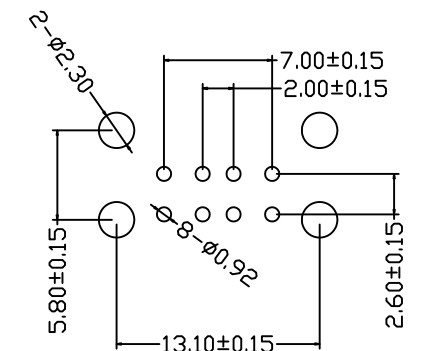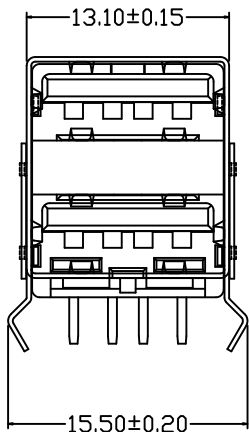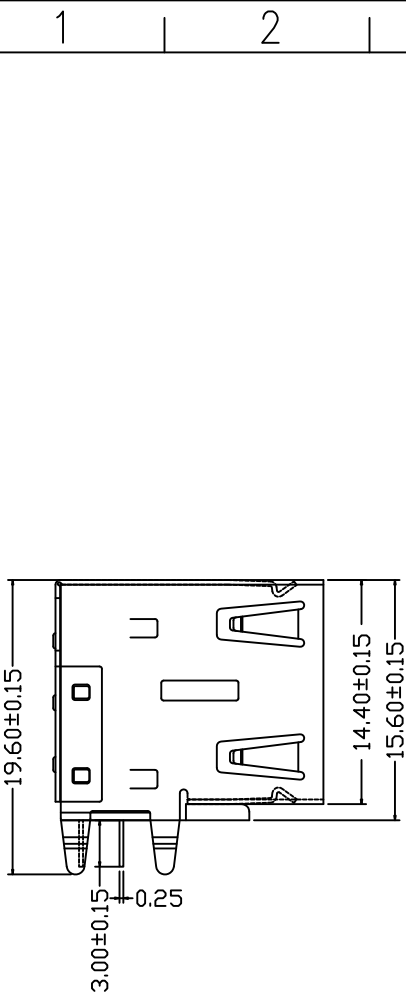

MAPX

MODIFICATION

DATE

特性:Specificaions

电气:Eleelrical:

1. 接触阻抗:Contact Resistance
30 milliohms MAX
2. 耐电压:Dielectnec Withstanding Voitage:
500 V AC AT Sea Levot
3. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

机构:Mechanical:

1. 结合为:Mating Force:
4.0KG NAX 最大4kg
2. 拔出力:Unmating Force:
0.5 KG NIN 最少0.5kg

材料:Matorial:

1. 塑胶:Housing:Hing Temperature Tnermaplastio
2. 端子:Contact:Copper Alloy 铜合金
3. 外壳:Shell: Copper Aiioy铁/铜合金

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talis
接触点镀金. 脚镀锡
2. 外壳:Shell:

Nickel Plating

镀镍

产品图

PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°



深圳市精拓金电子有限公司

单位
UNITS

MM

制图
DRAWING

Z-Y-B

制图料号
PRODUCT PART NO.

907-122A1012D10200

比例
SCALE

1:1

审核
CHKD产品名称
PRODUCT_NO.AF90度17.0双层半包弯脚无边平
弹铜壳PBT白胶日期
DATE

2014.06.09

核准
APPD角法
VIEW版本
VER

A0