



MAPX	MODIFICATION	DATE

- NOTE:
1. Material:
Housing: Thermoplastics
Contact: Phosphor Bronze C5191-EH/C2680-EH, T=0.25mm
Shell: COPPER ALLOY T=0.30mm
2. FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min.Tin Plated on Solder Area
50u" Min.Nickel Underplating Over All.
Shell: 50u" Min.Nickel Underplating Over All.
3. Specification:
- 3.1: Rating:
Rated voltage 500V AC/DC. Rated current: 2 A Max.
- 3.2: Electrical:
Insulation Resistance(EIA-364-21):
1000M Ω Min. at 500V/DC for 1Minute.
Contact Resistance(EIA-364-23):
30 m Ω Max. at 20mV Max, 50mA
Dielectric Withstanding Voltage(EIA-364-20):
No discharge, flashover or breakdown at 500V/AC
1Minute
4. Plug extraction force shall be between 1.0kgf and 2.00kgf
5. Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

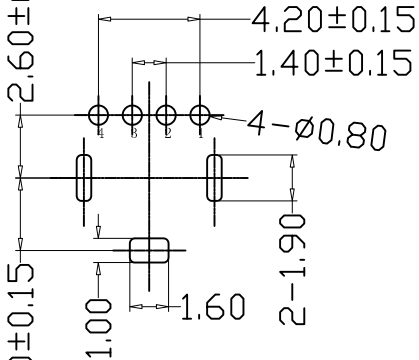

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ± 0.05

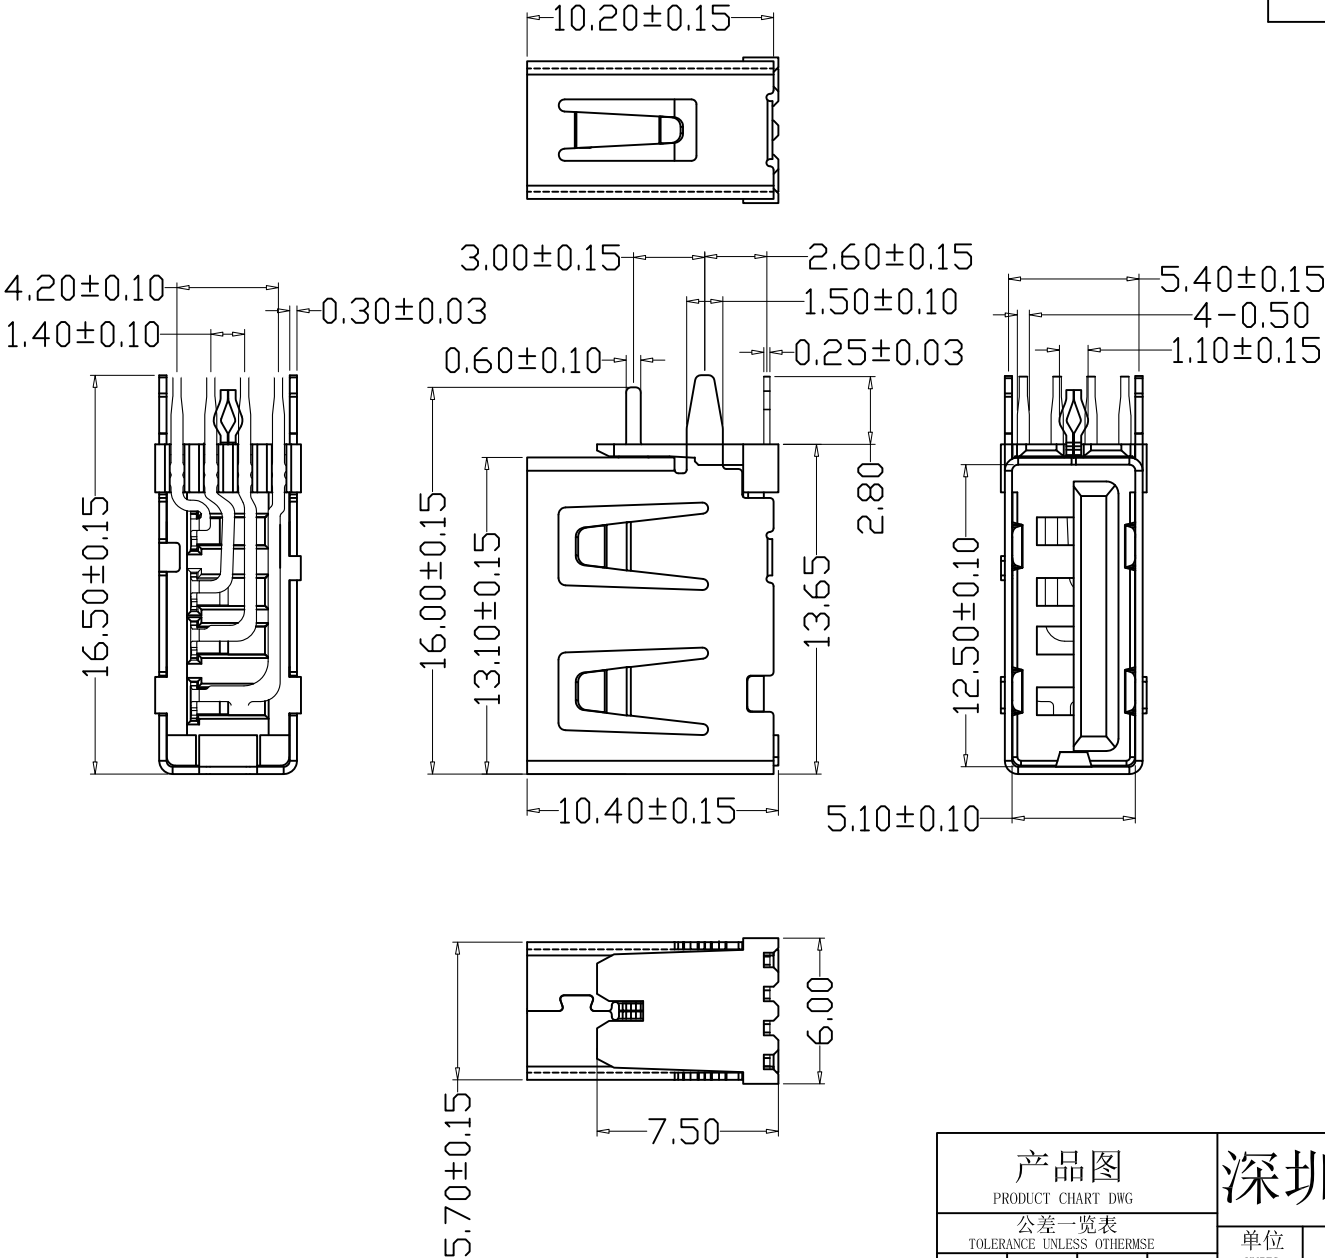

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	906-561A1014D10200		
X.	± 0.25	X.	$\pm 5.$	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.	AF10. 0侧插短体外直内0型脚无边 铁壳PBT白胶	
.X	± 0.20	.X	$\pm 2.$	日期 DATE	2014. 02. 20	核准 APPD	角法 VIEW	版本 VER	AO
.XX	± 0.15	.XX	$\pm 1.$						
.XXX	± 0.10	.XXX	± 0.5						