


PIN NUMBER	SIGNAL NAME
PIN 1	Vbus
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	SiDA_SSRX-
PIN 6	SiDA_SSRX+
PIN 7	GND_DRAIN
PIN 8	SiDA_SSTX-
PIN 9	SiDA_SSTX+
SHELL	GND

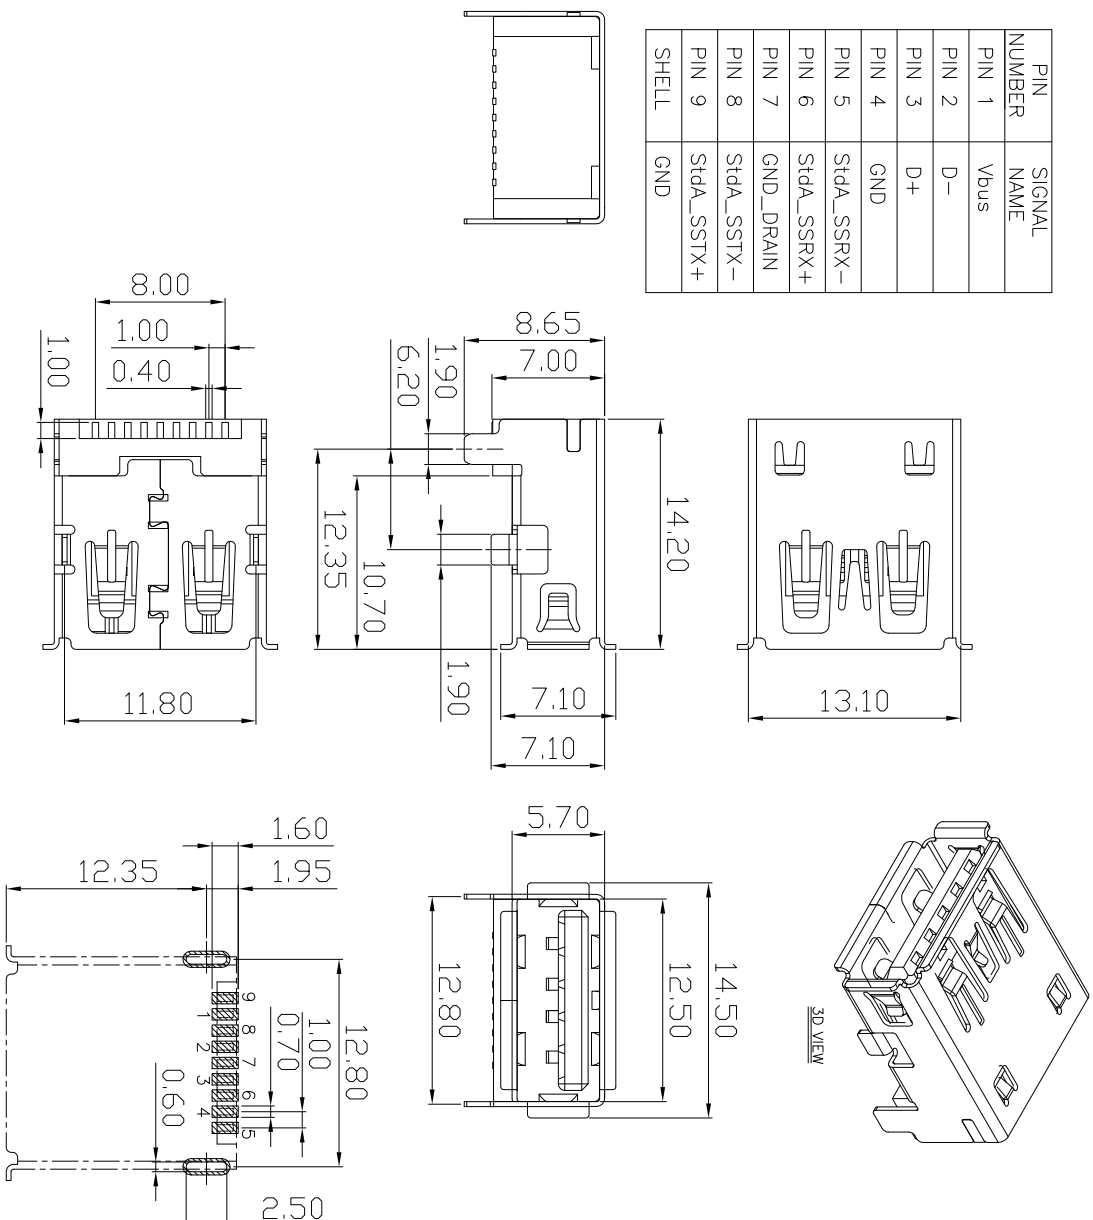

NOTES:

- MATERIAL:
  - HOUSING: LCP ,COLOR IS BLUE;
  - CONTACT: BRASS, (H65 T=0.20mm);
  - SHELL: COLD ROLLED IRON (SPCC,T=0.3mm);
- FINISH:
  - TERMINAL: CONTACT AREA: GOLD PLATED G/Fu"; SOLDER AREA: PLATED OVER TIN; SHELL: NI PLATED OVER ALL ;
- ELECTRICAL:
  - VOLTAGE RATING: 30 VAC RMS;
  - CURRENT RATING: 1.5 AMP;
  - CONTACT RESISTANCE: 30MILLIOHMS MAX.;
  - WITHSTAND VOLTAGE: 500 VAC RMS
- INSULATION RESISTANCE: 50(60)HZ,1MIN.;; 100MEGOHMS MIN @500V DC;
- MECHANICAL:
  - MATING FORCE: 35N MAX.;
  - UNMATING FORCE: 5~35N;
  - OPERATING LIFE: 1500 CYCLES MIN.;
- ENVIRONMENTAL:
  - STORAGE TEMPERATURE RANGE: -40°C~+85°C;
  - OPERATION TEMPERATURE RANGE: -25°C~+70°C;

目錄

設 變 內 容

日 期

# 深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG		单位		制 图		产品料号	
公差一览表 (FOUR FRACTION UNLESS OTHERWISE SPECIFIED)		MM		张如波		903-631A2020S10100	
X	±0.40	1:1	审核	郭治富	产品名称	HF3.0无盖4.2插直脚有边铁壳连接器SMT	
.X	±0.30	日期	核准	黄国荣	角法		版本
.XX	±0.20	2022/05/10					A0
.XXX	±0.10						