
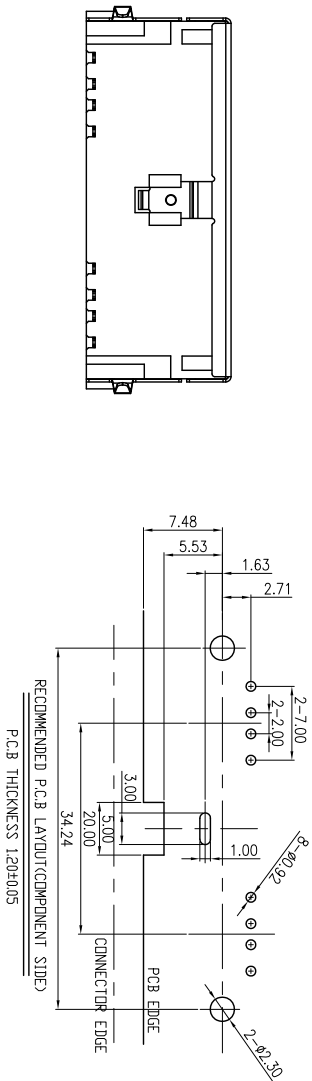
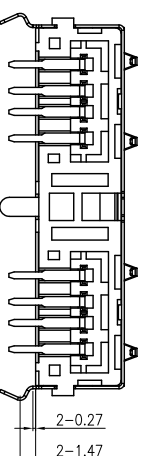

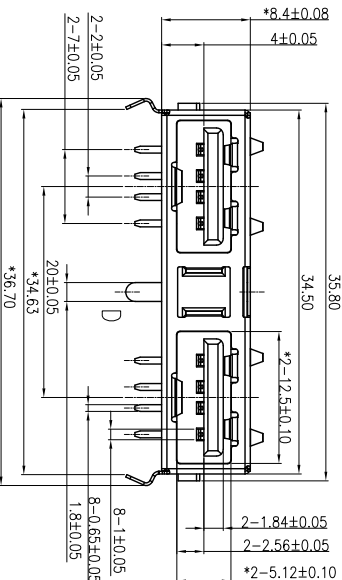


目 录	设 变 内 容	日 期

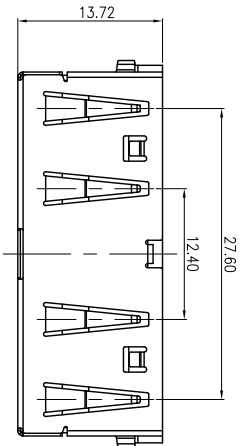

- NOTE:
1. MATERIAL: DEFAULT DIMENSION TOL: ±0.05
 - 1.1 BODY INSULATOR: PBT F202G30, UL94V-0, BLACK
 - 1.2 SHELL: SUS304-3/4H, T=0.25mm
 - CONTACT: PHOSPHOR BRONZE
 - 1.3 CONTACT PLATING: Au 0.75~1.75µm PLATING ON CONTACT AREA, SN 2.5~4.0µm PLATING ON SOLDER TAILS, NI 1.25~2.75µm UNDERPLATING OVERALL.
 - 1.4 SHELL: 50~150µ" (1.25~3.18µm) Sn PLATED OVERALL, 防變色處理 30~120µ" (0.75~3.05µm) NICKEL UNDERPLATING OVERALL.
2. SPECIFICATION:
- 2.1 CURRENT RATE: 1.5Amp
 - 2.2 INSULATOR RESISTANCE: 100MΩ MIN
 - 2.3 DIELECTRIC STRENGTH: 100V AC PER MINUTE
 - 2.4 CONTACT RESISTANCE: 30mΩ Max
 - 2.5 OPERATION TEMPERATURE: -55°C~+105°C
 - 2.6 INSERTION FORCE: 35N Max, WITHDRAWAL FORCE: (10~15)N

3	CONTACT	8	T=0.2 CS19IRH	Au-Sn
2	METAL SHELL	1	T=0.25 SUS304	Sn-Ni
1	HOUSING	1	PBT F202G30 Black(Sinlong)	Black
ITEM	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位	制图	产品料号
X	±0.30	X'	±5°	MM	张如波	903-857A1023D10200
X	±0.25	X'	±2°	比例	郭治富	产品名称
.XX	±0.15	.XX'	±1'	日期	审核	PRODUCT NO.
.XXX	±0.10	.XXX'	±0.5°	2022/05/10	黄国荣	角法
						版本
						A0