


1	912-121A2031S10100	5
2		6
3		7
4		8

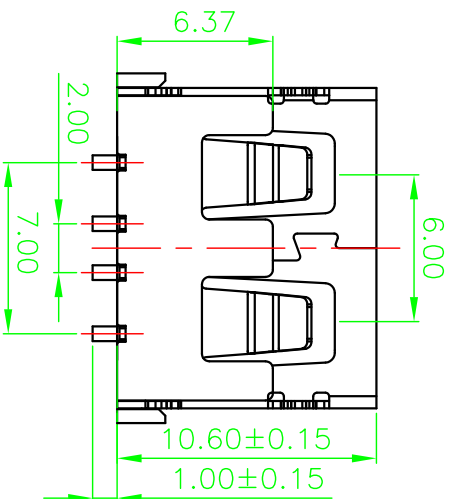

Note:


- Material:
  - 1.1, Housing: High temperature thermoplastic with/black G/F, UL94V-0
  - 1.2, Contact: copper alloy, t=0.25mm
  - 1.3, Shell: copper/Ferroalloy alloy, t=0.30mm
- Specification:
  - 2.1, Current rating: 1.5A Max.
  - 2.2, Dielectric withstanding voltage: 100 V(ac) for 1 min.
  - 2.3, Contact resistance: 30 mΩ Max.
  - 2.4, Insulation resistance: 100 MΩ Min.
  - 2.5, Total mating force: 3.57 Kgf Max.
  - 2.6, Total unmating force: 1.0 Kgf Min.
- Finish:
  - 3.1, Contact: Plated Gold in Mating Area: Tin On Solder Tolls

4.Environmental:

- 4.1, Temperature range: -55°C~85°C

PART ON:

912-11XXXXX1S1XX

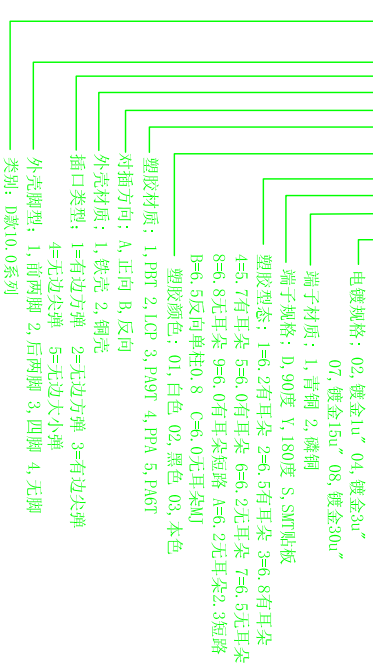

**深圳拓金电子有限公司**

DRAWN  
CHECKED  
APPROVED

PART NO. 912-121A2031S10100

APPROVED

AF110. 6D款前两脚无边方弹铁壳LCP本色; 2SMT



UNIT  
mm

TOLERANCE  
.XXX±.10, .XX±.20, .X±.25, ANGLE±5°

SCALE SHEET SIZE REV.  
1:1 1 OF 1 A4 X1