



5	COVER	PBT+30%G.F., UL94V-0		BLACK
4	HOUSING	PBT+30%G.F., UL94V-0		BLACK
3	MIDDLE BULLET	SK7		Nickel Plated & Copper Plated
2	SHELL	SPCC-SD	BRIGHT Tin 80u" Min OVER Ni 50u" Min	
1	CONTACTS (1,2,3,4PORT)	Copper Alloy	AuG/F & Matte Tin Plated & Nickel Plated	
NAME		MATERIAL		COLOR

U4120D-UA *-0001R




C:SUS430
G:SPCC
H:G/F
C:Au15u"
D:Au30u"

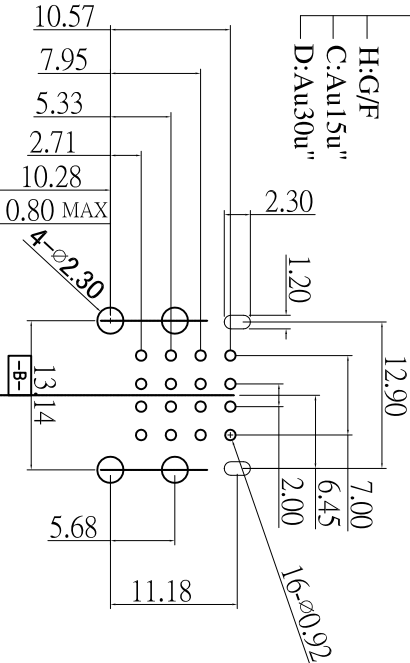

RECOMMENDED P.C.B. LAYOUT (1) (THICKNESS=1.6mm)
(GENERAL TOLERANCE: ±0.05)

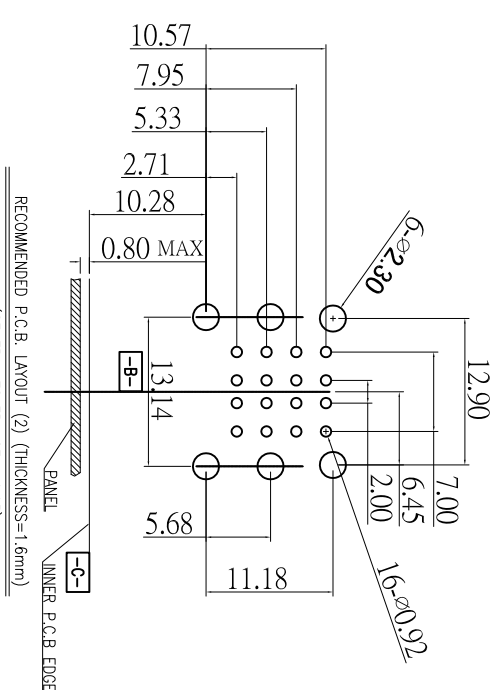

RECOMMENDED P.C.B. LAYOUT (2) (THICKNESS=1.6mm)
(GENERAL TOLERANCE: ±0.05)

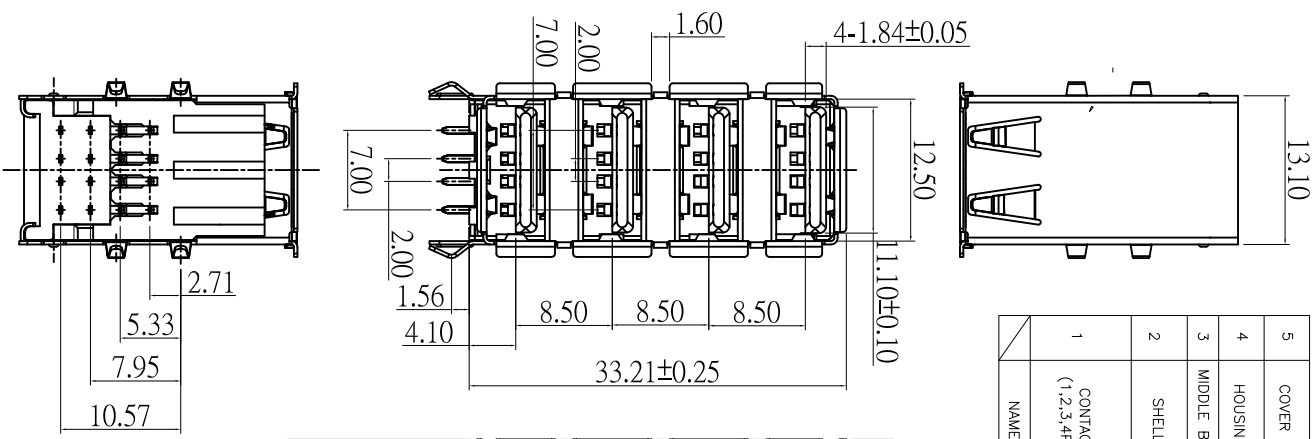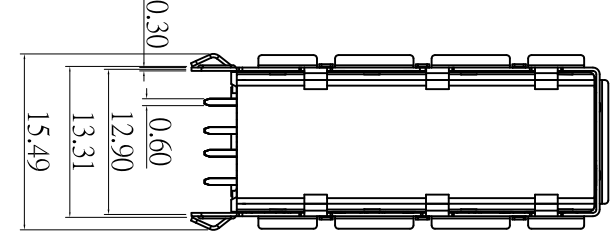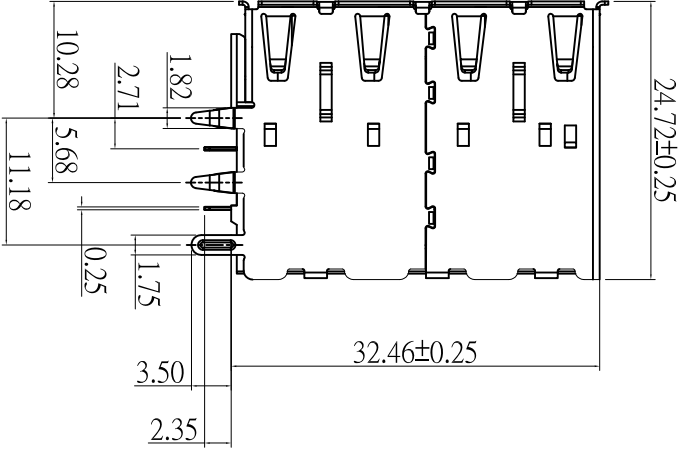

深圳市精拓金电子有限公司

产品图				公差一览表			
TOLERANCE DIMENSION				公差一览表			
X	±0.15	X	±5°	单位	MM	制图	许榕强
X	±0.10	X	±2°	比例	1:1	审核	郭治富
XX	±0.05	XX	±1°	日期	2016-09-09	核准	黄国荣
XXX	±0.03	XXX	±0.5°	DATE		APRD	
PRODUCT PART NO.				图料号			
907-111A102CD10200				907-111A102CD10200			
PRODUCT NAME				产品名			
AP2.090度四层后盖弯脚边平弹铁壳PBT黑胶				角法			
VER				版本			
A0				A0			